


H265+ FISH EYE Network Cammera




FCS-3065 (5MP)




Level One		 H265+ FISH EYE Network Cammera
Camera	Model	FCS-3065 (5MP)
	image Sensor	1/2.8" Progressive Scan CMOS
	min.illumination	Color: 0.005Lux@F1.2 Color: 0.008Lux@F2.0B/W : 0Lux with IR on
	WDR	120dB Super WDR
	shutter Time	1/100000s~1s
	IR distance	Up to 15m
	Lens	1.25mm@F2.0
	Mount	M12
	field of view	Ceiling Mount: 360°; Wall Mount: 180°; Flat Mount: 360°
	day&night	Day/Night/Auto/Customize/Schedule
	S/N	55dB
Video	Max resolution	2592x1944
	primary stream	Fisheye View: 30fps@(2592x1944, 1944x1944, 1536x1536, 1280x1280)
	Secondary stream	60fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x180)
	tertiary stream	Fisheye View: 30fps@(1280x960, 1024x1024, 720x720, 320x320)
	Video Compression	H.265+/H.265(HEVC)/H.264+/H.264
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)
	Privacy Masking	Up to 24 areas
	ROI	Up to 8 areas
	Image Setting	Brightness/Contrast/Saturation/Sharpness
Display	Mount Mode	Ceiling Mount/Wall Mount/Flat Mount
	Decoding Mode	On-board Dewarping/Client-side Dewarping
	Display Mode	11 display modes in total Client-side Dewarping: Ceiling Mount: 1O, 1P, 2P, 4R, 1O3R, 1P1R, 1P4R, 1P6R, 1O8R Wall Mount: 1O, 1P, 4R, 1O3R, 1P1R, 1P4R Table Mount: 1O, 1P, 2P, 4R, 1O3R, 1P1R, 1P4R, 1P6R, 1O8R On-board Dewarping: Ceiling Mount: 1O, 1P, 2P, 4R, 1O3R, 1P3R, 1O1P3R Wall Mount: 1O, 1P, 4R, 1O3R, 1P3R, 1O1P3R Table Mount: 1O, 1P, 2P, 4R, 1O3R, 1P3R, 1O1P3R Note: 1. Only Fisheye in Multi-Channel Mode supports 1O1P3R. 2. The above letters O, P and R are explained as follows: O----Fisheye View; P----180° Panoramic View; 2P----2*180° Panoramic View; R----PTZ
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port
	Audio I/O	Built-in Microphone
	Alarm I/O	N/A
Network	Network Storage	NAS(Support NFS, SMB/CIFS), ANR
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL

H265+ FISH EYE Network Camera



Level One		 H265+ FISH EYE Network Cammera
Network	Network Storage	NAS(Support NFS, SMB/CIFS), ANR
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL
Audio	Audio Compression	G.711/AAC/G.722/G.726
	Audio Sampling Rate	8/16/32/48KHz
	Audio Bit Rate	16~256kbps
System	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 256G
	Advanced Function	Auto Tracking, Heat Map, BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, EIS, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	Event Trigger	Motion Detection, Network Disconnection, Audio Alarm, etc.
	Event Action	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed
General	System Compatibility	ONVIF Profile G & Q & S & T, API
	Working Temperature	(- 40) (+60)°C
	Working Humidity	0~90%(Non-condensing)
	Power Supply	PoE (802.3af) / DC 12V±10%
	Power Consumption	4.2W MAX6.6W MAX (With IR on)
	Housing	Vandal-proof IK10-rated Metal Housing
	Weather Proof	Up to IP67-rated for Weather-resistant Performance
	Weight	1100g
	Dimensions	Φ140mmX45.4mm
	Warranty	2/5 Years


Structure Diagrams

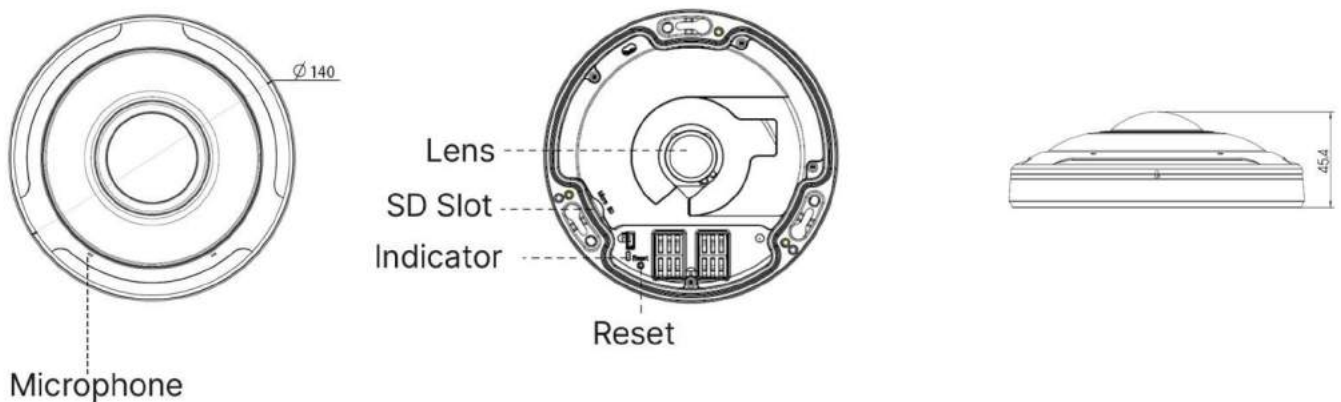


H265+ FISH EYE Network Camera



5MP Fisheye Camera

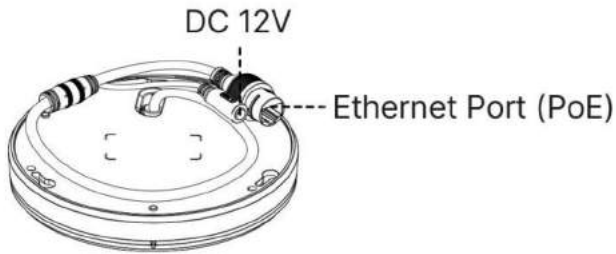

12MP Fisheye Camera

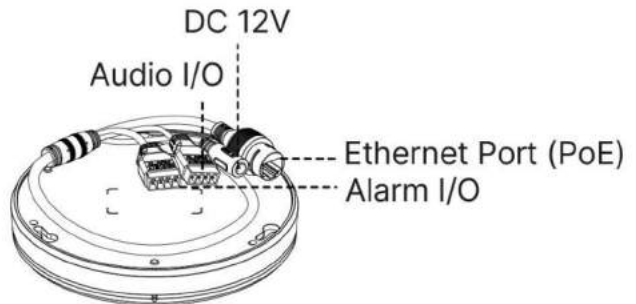

Units: mm

Accessories Support

A01 Pole Mount

Weight: 720g
Dimensions: 170*51.5*152.6mm



A03 External Corner Bracket

Weight: 900g
Dimensions: 170*152.5*76.3mm



A72 Wall Mount

Weight: 560g
Dimensions: 240*160*136mm



A75 Junction Box

Weight: 200g
Dimensions: 145*167*33.5mm



A76 Pendant Mount

Weight: 620g
Dimensions: 136*L (L is default as 300mm, also can be extended with A76-L)



A76-L Extension Lever

Weight: 315g
Dimensions: 34*300mm

