


FCS-5294 (2MP)/FCS-5601(H) (5MP)/FCS-5093(H) (8MP)

Level One		 <b>H265+ Vandal proof mini Bullet Network Camera</b>		
Camera	Model	FCS-5204 (2MP)	FCS-5601(H) (5MP)	FCS-5093(H) (8MP)
	image Sensor	1/2.8" Progressive Scan CMOS		
	min.illumination	Color: 0.002Lux@F1.2 B/W: 0Lux with IR on	Color: 0.005Lux@F1.2 B/W: 0Lux with IR on	Color: 0.01Lux@F1.2 B/W: 0Lux with IR on
	WDR	140dB Super WDR		120dB
	shutter Time	1/100000s~1s		
	IR Distance	Up to 30m	Up to 25m	Up to 30m
	day&night	ICR Filter Auto Switch		
	S/N	55dB		
Lens	Lens	2.8mm/4mm/6mm @F1.6	4mm/2.8mm/6mm @F1.6	4mm/2.8mm/6mm @F1.6
	field of view	H111°/D128°/V61°(2.8mm) H91°/D106°/V50°(4mm) H55°/D63°/V32°(6mm)	H86°/D108°/V63°(4mm) H105°/D131°/V78°(2.8mm) H52°/D63°/V40°(6mm)	H91°/D106°/V50°(4mm) H110°/D126°/V60°(2.8mm) H55°/D63°/V32°(6mm)
	mount	M12		
Video	Max resolution	1920x1080	2592x1944	3840x2160
	primary stream	30fps@(1920x1080, 1280x960, 1280x720, 704x576)	20fps@(2592x1944), (H) :30fps@(2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)	30fps@(3840x2160)(Optional for H Series), 15fps@(3840x2160), 30fps@(3072x2048, 2592x1944, 2592x1520, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)
	Secondary stream	30fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x180)	30fps(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x180)	
	tertiary stream	30fps@(704x576, 640x480, 640x360, 320x240, 320x192, 320x180))	30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192, 320x180)	
	Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG		
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)		
	Image Setting	Brightness/Contrast/Saturation/Sharpness		
Interface	Ethernet	1*RJ45 10M/100M Ethernet Port		
	Audio I/O	Built-in Microphone	1/1 (Multi-interface Version)	
	Alarm I/O	1\1	1/1 (Multi-interface Version)	
Network	Network Storage	NAS(Support NFS, SMB/CIFS), ANR		
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP,		
Audio	Audio Compression	G.711/AAC/G.722/G.726		
	Audio Sampling Rate	N/A	N/A	8/16/32/48KHz
	Audio Bit Rate	N/A	N/A	16~256kbps
	Two-way Audio	N/A	Support	

# H265+ Vandal proof mini Bullet Network Camera




## H265+ Vandal proof mini Bullet Network Camera

Level One		H265+ Vandal proof mini Bullet Network Camera		
	Model	FCS-5204 (2MP)	FCS-5601(H) (5MP)	FCS-5093(H) (8MP)
	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 256G		
	Advanced Function	Privacy Masking, BLC, HLC, 2D DNR, 3D DNR, ROI, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
System	Event Trigger	Motion Detection, Network Disconnection, etc.	Motion Detection, Network Disconnection, etc.; Motion Detection, Network Disconnection, External Input, Audio Alarm, etc. (Multi-interface Version)	
	Event Action	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.; FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc. (Multi-interface Version)	
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed		
	System Compatibility	ONVIF Profile G & Q & S & T		
General	Working Temperature	(- 40) (+60)°C		
	Working Humidity	0~90%(Non-condensing)		
	Power Supply	PoE (802.3af)	PoE (802.3af) / DC 12V±10% (Multi-interface Version)	
	Power Consumption	2.5W MAX 3.5W MAX (With IR on)	4.5W MAX 6W MAX (With IR on)	6W MAX 7W MAX (With IR on)
	Housing	Vandal-proof IK10-rated Metal Housing		
	Weather Proof	Up to IP67-rated for Weather-resistant Performance		
	Weight	450g (Cable Out Version) / 610g (Junction Box Version)	750 g	
	Dimensions	Φ64mmX160mm (Cable Out Version) / 97mmX74mmX180mm (Junction Box Version)	Φ76mmX214.5mm	
	Warranty	2/5 Years		

## Structure Diagrams







### Junction Box Version

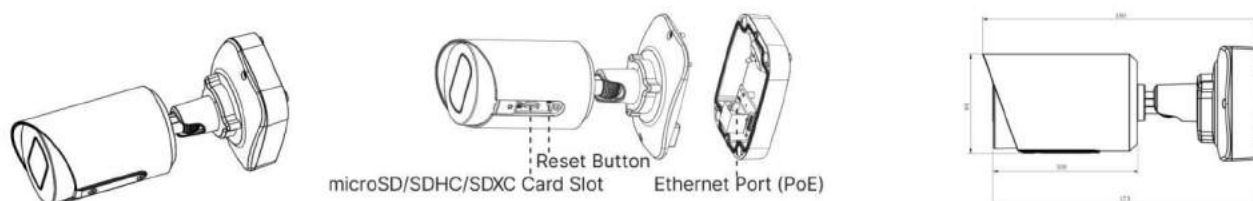

# H265+ Vandal proof mini Bullet Network Camera



## Cable Out Version

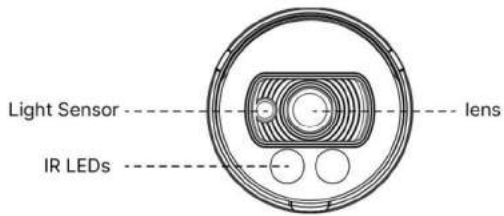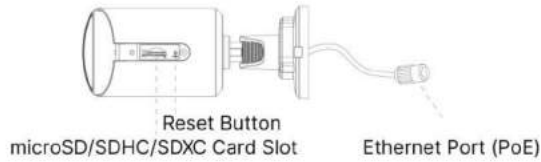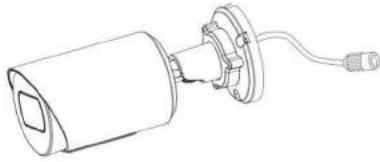

Units: mm

## Accessories Support

A01 Pole Mount

Weight: 720g  
Dimensions: 170\*51.5\*152.6mm



A03 External Corner Bracket

Weight: 900g  
Dimensions: 170\*152.5\*76.3mm

