




H265+ Vandal proof Motorized mini Bullet Network Camera

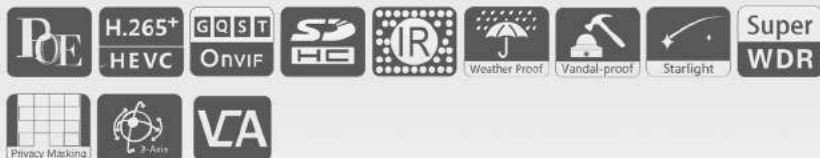


FCS-5060 (2MP)/FCS-5215(H) (5MP)/FCS-5095(H) (8MP)

Level One		H265+ Vandal proof Motorized mini Bullet Network Camera		
		FCS-5060 (2MP)	FCS-5215(H) (5MP)	FCS-5095(H) (8MP)
Camera	Model	FCS-5060 (2MP)	FCS-5215(H) (5MP)	FCS-5095(H) (8MP)
	image Sensor	1/2.8" Progressive Scan CMOS		
	min.illumination	Color: 0.002Lux@F1.2 Color: 0.005Lux@F1.4 B/W: 0Lux with IR on	Color: 0.005Lux@F1.2 Color: 0.008Lux@F1.4 B/W: 0Lux with IR on	Color: 0.01Lux@F1.2 Color: 0.012Lux@F1.4 B/W: 0Lux with IR on
	WDR	140dB Super WDR	120dB	
	shutter Time	1/100000s~1s		
	IR Distance	Up to 50m		
	day&night	Day/Night/Auto/Customize/Schedule		
	S/N	55dB		
Lens	Lens	Motorized 2.7~13.5mm/3.0~10.5mm/7~22mm@ F1.4 P-Iris(Optional)	Motorized 2.7~13.5mm/3.0~10.5mm/7~22mm @F1.4 P-Iris(Optional)	Motorized 2.7~13.5mm@F1.4 P-Iris(Optional)
	focus control	Auto/Manual		
	iris control	Auto/Manual		
	field of view	H111°~H34°/D130°~D39°/V60°~V19°(2.7~13.5mm) H100°~H33°/D115°~D38°/V54°~V18°(3.0~10.5mm) H42°~H17°/D48°~D19°/V24°~V9°(7~22mm)	H99°~H31°/ D124°~D38°/V72°~V23°(2.7~13.5mm) H89°~H31°/D111°~D38°/V66°~V23°(3.0~10.5mm) H37°~H15°/D46°~D19°/V28°~V11°(7~22mm)	H107°~H33°/D125°~D37°/V58°~V18°
Video	mount	Φ14		
	Max resolution	1920x1080	2592x1944	3840x2160
	primary stream	30fps@(1920x1080, 1280x960, 1280x720, 704x576)	20fps@(2592x1944), (H):30fps@(2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)	30fps@(3840x2160)(Optional for H Series), 15fps@(3840x2160), 30fps@(3072x2048, 2592x1944, 2592x1520, 2048x1536, 1920x1080, 1280x960, 1280x720, 704x576)
	Secondary stream	30fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x180)		
	tertiary stream	30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192, 320x180)		
	Video Compression	H.265+/H.265(HEVC)/H.264+/H.264/MJPEG		
	Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)		
	Privacy Masking	Up to 8 areas	Up to 24 areas	
ROI	Up to 8 areas	Up to 8 areas		
Interface	Image Setting	Brightness/Contrast/Saturation/Sharpness		
	Ethernet	1*RJ45 10M/100M Ethernet Port		
	Audio I/O	1/1 (Multi-interface Version)		
	Alarm I/O	1/1 (Multi-interface Version)		




H265+ Vandal proof Motorized mini Bullet Network Camera



Level One		 H265+ Vandal proof Motorized mini Bullet Network Camera		
Network	Model	FCS-5060 (2MP)	FCS-5215(H) (5MP)	FCS-5095(H) (8MP)
	Network Storage	NAS(Support NFS, SMB/CIFS), ANR		
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP,		
	Audio Compression	G.711/AAC/G.722/G.726		
Audio	Audio Sampling Rate	8/16/32/44.1/48KHz (44.1KHz is available for all except R & T & Q Series.)	8/16/32/48KHz (32KHz and 48KHz are available for H Series.)	8/16/32/44.1/48KHz
	Audio Bit Rate	16~256kbps	16~96kbps, 16~256kbps(Optional for H Series)	16~256kbps
	Two-way Audio	Support		
System	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 256G		
	Advanced Function	Privacy Masking, BLC, HLC, 2D DNR, 3D DNR, ROI, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
	Event Trigger	Motion Detection, Network Disconnection, etc.		
	Event Action	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.		
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed		
	System Compatibility	ONVIF Profile G & Q & S & T		
General	Working Temperature	(- 40) (+60)°C		
	Working Humidity	0~90%(Non-condensing)		
	Power Supply	PoE (802.3af) / DC 12V±10%		
	Power Consumption	8W MAX 11.5W MAX (With IR on)	8.5W MAX 12W MAX (With IR on)	5.2W MAX 7W MAX (With IR on)
	Housing	Vandal-proof IK10-rated Metal Housing		
	Weather Proof	Up to IP67-rated for Weather-resistant Performance		
	Weight	825 g		
	Dimensions	Φ76mmX239.5mm		
	Warranty	2/5 Years		



Structure Diagrams

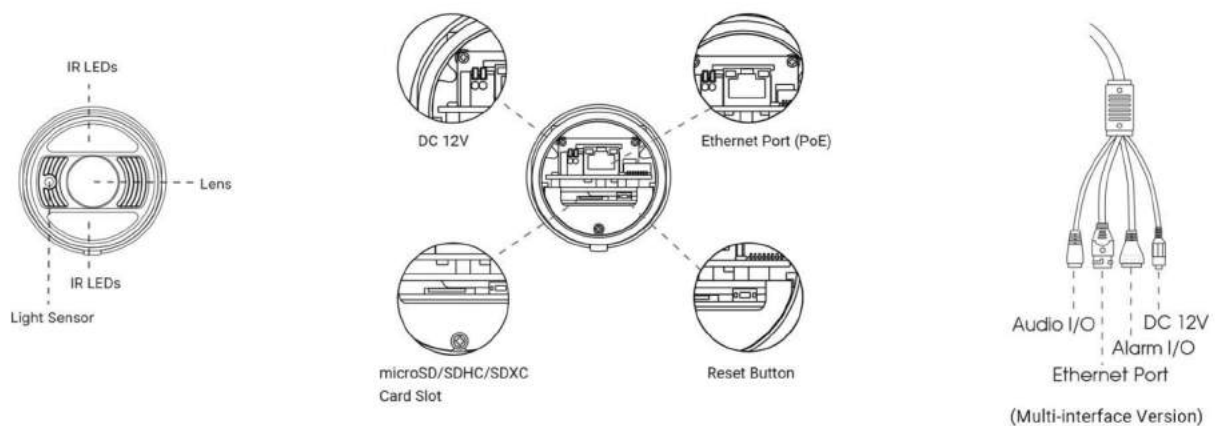

H265+ Vandal proof Motorized mini Bullet Network Camera



Structure Diagrams

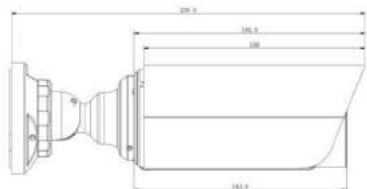

Units: mm

Accessories Support

A01 Pole Mount

Weight: 720g
Dimensions: 170*51.5*152.6mm



A03 External Corner Bracket

Weight: 900g
Dimensions: 170*152.5*76.3mm



A63 Junction Box

Weight: 620g
Dimensions: 134*126*40mm

