







Level One		 4K H265+ PRO NVR Series
Video/Audio Input	Model	NVR-0732 (4K)
	Network Video Input	32-CH
	Bandwidth Incoming	256Mbps or 200Mbps(when RAID is enabled)
	Bandwidth Outgoing	256Mbps or 200Mbps(when RAID is enabled)
Video/Audio Output	HDMI Output	2-CH, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output
	VGA Output	2-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
	Dual Stream	Support
	Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF
	Synchronous Playback	4*(30fps @8MP), 5*(30fps @6MP), 6*(30fps @5MP), 8*(30fps @4MP), 10*(30fps@3MP),16*(30fps@1080P), 32*(30fps@720P)
Video/Audio Compression	Video Compression	H.265+/H.265(HEVC)/H.264+/H.264
	Audio Compression	G.711/AAC/G.722/G.726
	Sample Rate	8KHz/16KHz
Storage	SATA	8*SATA HDD(3.5")
	eSATA	1*eSATA
	Capacity	Up to 10TB capacity for each HDD
	Array Type	RAID0, RAID1, RAID5, RAID6, RAID10
Recording Management	Recording Type	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)
	Snapshot Type	Continuous, Event (Motion Detection, Alarm, VCA, Smart Analysis)
	Playback Type	General Playback, Event Playback, Tag Playback, Split Playback, Picture Playback
Backup	Backup	Video Backup, Image Backup
Network	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS

4K H265+ PRO NVR Series



Level One		 4K H265+ PRO NVR Series
	Model	NVR-0732 (4K)
External Interface	Network Interface	2*RJ45 10/100/1000Mbps
	Serial Interface	1*RS-485 Series Port for PTZ
		1*RS-232 Series Port for Console
		1*RS-485 Series Port for Keyboard
	USB Interface	1*USB 3.0; 2*USB 2.0
	Audio Input/Output	1*RCA/1*RCA
	Alarm Input/Output	16-CH/4-CH
General	Compatibility	ONVIF, API
	Advanced Function	ANR, N+1 Hot Spare
	ANPR	Support
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed
	Keyboard Control	Support
	Power Supply	AC 100V~240V 50Hz~60Hz
	Consumption	≤35W(Without HDD)
	Working Conditions	Temperature: -10°C~55°C / Humidity: 10%~90%
	Dimensions	Rack Mountable Chassis (2.0U Standard) 440mm(W)X420mm(D)X88.2mm(H)
	Weight	6.0Kg
Warranty	2/5 Years	

Interfaces

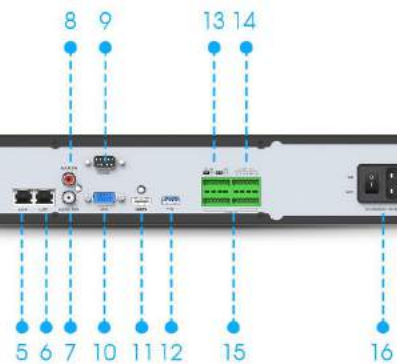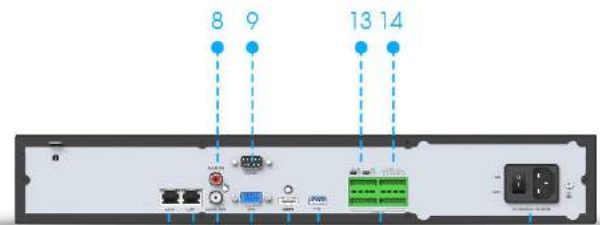

- 1. Run Indicator 2. HDD Indicator 3. USB 4. Power Light 5. LAN1 6. LAN2 7. Audio Out 8. Audio In
- 9. RS-232 10. VGA 11. HDMI 12. USB 13. RS-485 14. Alarm Out 15. Alarm In 16. Power

4K H265+ PRO NVR Series



Installation of HDDs



Step1



Step2



Step3




Step4



Step5

Structure Diagrams

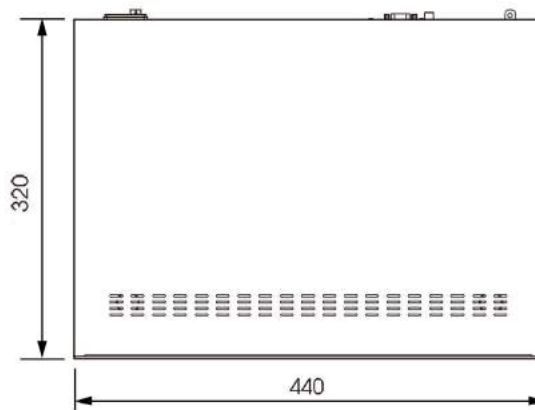

Units: mm

Naming Convention

